



**SUPER FAST DIODE MODULE TYPE 400A**

**Features**

- High Surge Capability
- Type 400V  $V_{RRM}$
- Isolation Type Package
- Electrically Isolation base plate




**Maximum Ratings**

Operating Temperature : -55°C to +175°C  
 Storage Temperature : -55°C to +175°C






Part Number	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
MURKA40040(A)(R)	400V	280V	400V

Dimensions in mm (1 mm = 0.0394")

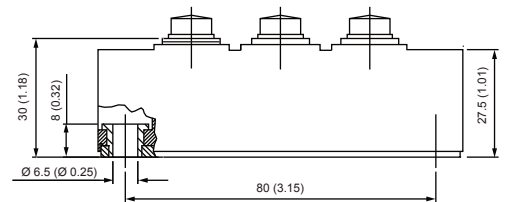

**Electrical Characteristics @ 25 °C Unless Otherwise Specified**

Average Forward Current (Per pkg)	$I_{F(AV)}$	400A	$T_C = 100^\circ C$
Peak Forward Surge Current (Per leg)	$I_{FSM}$	4000A	8.3ms , half sine
Maximum Instantaneous Forward Voltage * (Per leg)	$V_F$	1.30V	$I_{FM} = 200A;$ $T_J = 25^\circ C$
Maximum Instantaneous Reverse Current At Rated DC Blocking Voltage* (Per leg)	$I_R$	25 $\mu A$ 5 mA	$T_J = 25^\circ C$ $T_J = 125^\circ C$
Maximum Reverse Recovery Time (Per leg)	$T_{rr}$	150ns	$I_F = 0.5A, I_R = 1.0A,$ $I_{RR} = 0.25A$
Isolation Voltage	$V_{isol}$	3000V	A.C. 1minute
Maximum Thermal Resistance Junction To Case (Per leg)	$R_{\theta jc}$	0.17°C/W 0.35°C/W	Per pkg Per leg

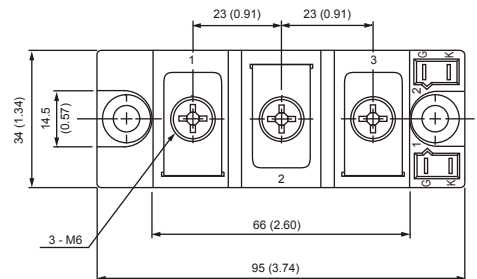

\*Pulse Test: Pulse Width 300  $\mu sec$ , Duty Cycle 2%



Figure .1- Typical Forward Characteristics

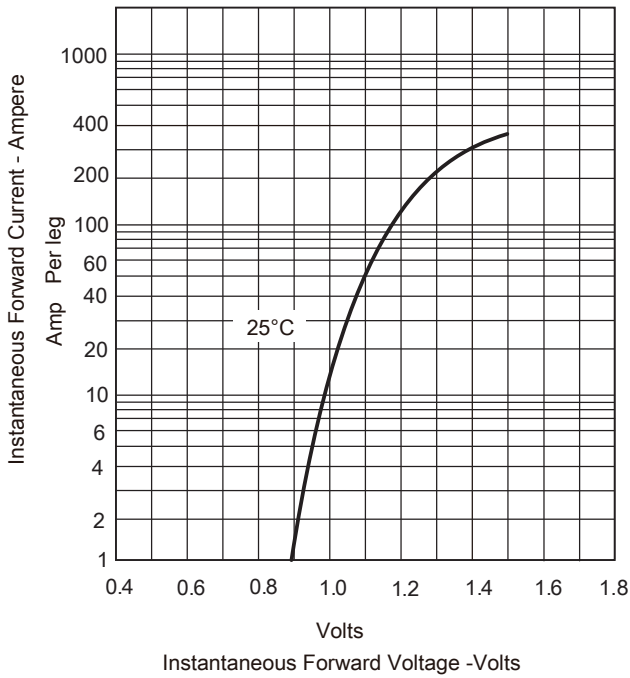


Figure .2-Forward Derating Curve

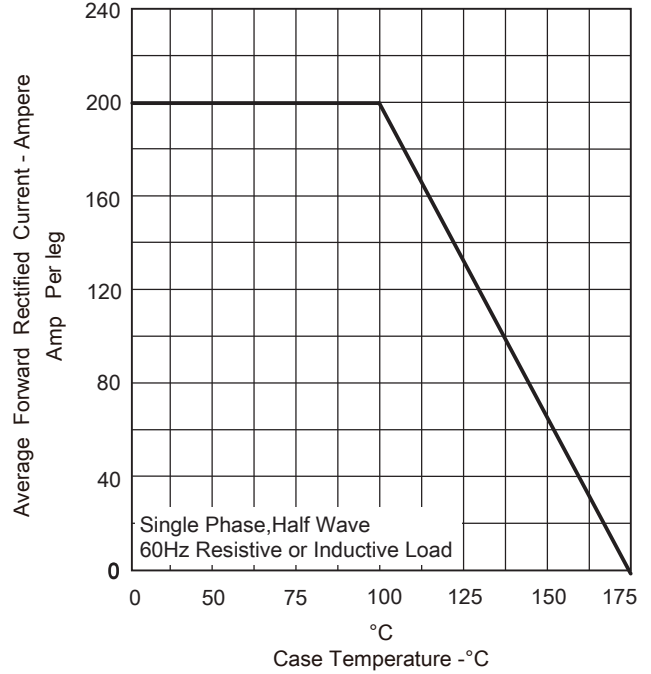


Figure .3- Peak Forward Surge Current

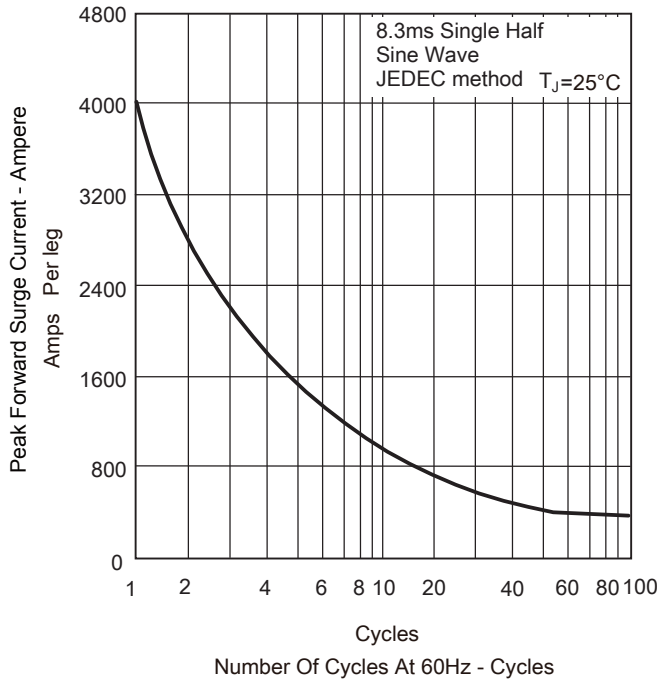


Figure .4-Typical Reverse Characteristics

